

AOC

80
SERIES

Best Ultra Slim Monitor for workplaces



I2080SW



Smile
Curve






► Features



IPS Panel

Experience superb picture quality with advanced IPS technology for brilliant, consistent color and wide viewing angles.

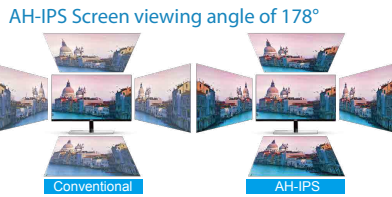

e-Saver

Software enables the user to set a low power configuration of the monitor when the PC is in screen saving, PC off, and user absence. User can choose the time to turn the monitor off, to save power consumption.

Microsoft Windows 8 Compatible




Flicker Free Backlight Technology

Most LED monitors use PWM (pulse width modulation) to control brightness; the pulsing creates flicker that may cause discomfort, headaches and eye strain, especially in low-light environments. Flicker Free technology uses a smooth DC (direct current) backlight system.



Clear Vision

The image performance engine can upscale Standard Definition (SD) sources to High Definition (HD) for sharper, more vivid viewing

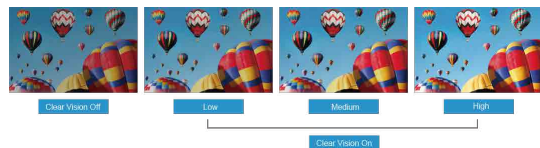

Screen +

The bundled Screen+ software splits the PC workspace into four self-contained panes to group application windows for easier viewing. Screen+ also supports multiple monitors.



i-Menu

Included PC software allows the user to change the OSD settings using their mouse.

► Specifications

Models	I2080SW
Panel size	19.5" W
Screen Ratio	16:10
Response Time (Typical)	6ms
Recommended Resolution	1440×900@60Hz
Contrast Ratio	1000:1 (Typical) 20,000,000:1 (DCR)
Brightness (Typical)	250 cd/m ²
Display Color	16.7M
Viewing Angle (H/V)	178/178
Viewable Image Size (mm)	494.03
Display Area	418.61(H)×262.35 (V)mm
Pixel Pitch (mm)	0.2907×0.2915mm
Scan Frequency (H/V)	30-83KHz/ 50-76Hz
Input Signal	Analog
Input Connector	15-pin D-Sub
Cable	D-sub
Built-in Speaker	N/A
HDCP Compatible	N/A
Input Power	100-240VAC, 50/60Hz
Power Supply	External
Operation Mode (W)	21W
Stand by Mode (W)	<0.5W
Wall- Mount	VESA 100x100mm
Cabinet Color	Black
Phys. (W×H×D) mm	454.6×375×190
Package Box (W×H×D) mm	513×370×107
Weight (Net/ Gross)(Kg)	2.14/3.15
Tilt	-5°~23°
Kensington lock	YES
Plug & Play	VESA DDC2B™ & DDC2B/CI
User Control	Auto/Exit, Clear Vision/-, Image Ratio/+ , Menu, Power
USB Plug	N/A
OSD Languages	16 languages
Safety Regulation	cTUVus, FCC, EPA 6.0, Windows 8, CE, CCC, ISO 9241-307, CB, BSMI

Design and Specifications are subject to change without notice.